

複合式雙經紗鉤編機


Compound Needle Lace Crochet Machine

DH 608-RLSN使用複合針，並配有雙經紗傳動裝置，可變化開放式、閉鎖式及繞線式組織。可生產鎖針、不脫線等成品，進而增加織物強度等保護作用。


DH 608-RLSN is a feature of COMPOUND NEEDLE lace crochet machine with double warp transmitting device can knit open lock-stitch, closed lock-stitch and tricot-stitch, giving the finished product anti-run back and interlock effects to obtain complex inter lacings-double lock stitch.



DH 608-RLSN

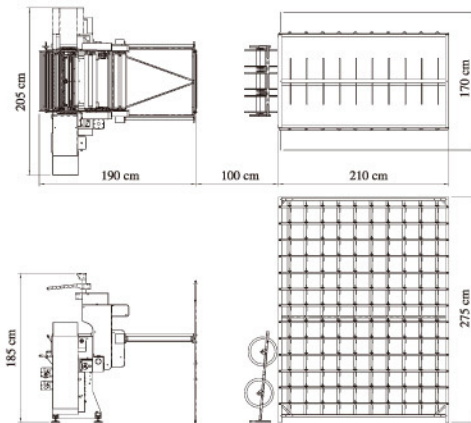

場地規劃 Installation layout

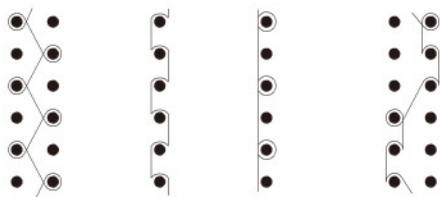

經編織圖 Warp Transmitting Pattern

| | | | |
|---|-----------------|----------------------------------|-----------------|
| 機械規格 Specification | 機台淨重 | Net Weight Of Machine | 700 kgs |
| | 紗架淨重 | Net Weight Of Creel | 130 kgs |
| | 紗架裝箱重量 | Weight of Creel and Crate | 180 kgs |
| | 機台裝箱重量 | Weight of Machine and Crate | 800 kgs |
| | 機台裝箱尺寸 | Crate of Machine | 206x127x190 cm |
| | 紗架裝箱尺寸 | Crate of Creel | 285x 74x 26 cm |
| 週邊設備及特殊裝置 Option device | 紗架 | Creel for 260 bobbins | 1 set |
| | 長鍊裝置 | Long Chain Device | 1 set |
| | 熱定型裝置 | HSR Heat Setting Device | 1 set |
| 技術資料 Technical data | 操作寬度 | Operation Width | 24 inch |
| | 針數 / 每英寸 | Gauge/Inch | 15 / 18 / 20 GG |
| | 花板鏈循環 | Chain Link Ratio | 12~48 pcs |
| | 速度 | Speed | 1000 rpm. |
| 標準配備及附件 Standard equipment & Accessories | 運轉馬達 | Operation Motor (1.5 HP) | 1 set |
| | 經紗針板 | Warp Yarn Bar | 2 sets |
| | 緯紗針板 | Weft Yarn Bar | 7 sets |
| | 橡膠針板 | Elastic Yarn Bar | 1 set |
| | 經紗平衡器 | Warp Yarn Tension Control Device | 2 sets |
| | 緯紗輸送輪組 | Weft Yarn Feeding Roller | 1 set |
| | 膠絲輸送輪組 | Elastic Yarn Feeding Roller | 2 sets |
| | 斷紗自停裝置 | Automatic stop motion device | 1 set |
| | 成品後分帶輪組 | Finished Product Collector | 1 set |
| | 自動油泵 | Automatic lubricator | 1 set |
| | 工具 | Tool | 1 set |
| | 鍊輪 (06B) | Chain Gear (06B) | 1 set |
| | 變頻器 | Inverter | 1 set |
| | 經紗針片 | Lead Block | 10 pcs |
| | 緯紗導管 | Weft Tube | 200 pcs |
| 複合針 | Compound Needle | 200 pcs | |
| 停機針 | Dropper | 600 pcs | |

